
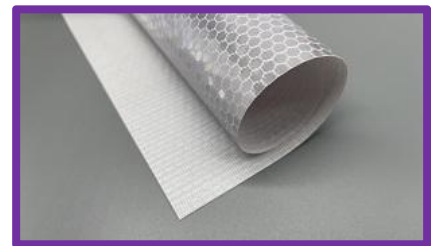


## Features

- Vibrantly and consistent printing quality
- Strong durable base fabric
- Great cost-effective
- Glossy surface available
- Best suited for indoor/outdoor front-lit displays

## Applications

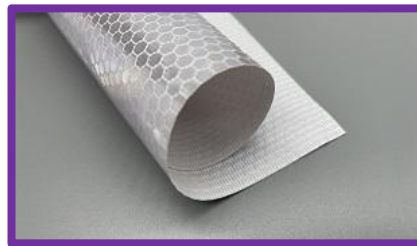

## Technical Data Sheet

Item Code	FBRBTIDM320T		Test Method
Base Fabric	200D*300D		DIN EN ISO2060
Weight (GSM)	340		DIN EN ISO2286-2
Tensile Strength	Warp (N/5cm)	150	ISO527/3:1995
	Weft (N/5cm)	129	ISO527/3:1995
Tear Strength	Warp (N/5cm)	57	ISO4674/1:2003
	Weft (N/5cm)	45	ISO4674/1:2003
Adhesion Strength	N/A		DIN53357:1982
Temperature	-30°C/+70°C		ISO13934-1:1999
RF Weldable (Heat Sealable)	YES		DIN53354
Flame Retardant	B1/M1/M2/NFPA701		

Information contained in this document is based on our general experience and is given in good faith. But we are unable to accept responsibility in respect to factors which are outside our knowledge or control.

## Ink Printability

SOLVENT



ECO-SOLVENT



UV



LATEX



SCREEN PRINTING



Add: Room 912, No.3 Building, Shangdong Business Center, Haizhou District,  
Haining, Zhejiang, China  
Tel: +86-573-80776996 Fax: +86-573-80776998  
Mob/Skype/Wechat: +86-15858322153  
<mailto:contact@hncomax.com> <https://www.hncomax.com>

